

PRODUCT CATALOGUE



ON THE SPOT



We don't sell light. We help you create experiences through light

Since 1994, ON THE SPOT has had one simple mission: to make your store environment and your products look as stunning as possible. That's what keeps us moving forward. Keeps us experimenting. Constructing. Illuminating. And that's what makes us proud, when we enter a retail store somewhere around the world: to see our light make the difference. To see our light push the sales.

That's what you get when working with us. We don't sell light. We help you create experiences through light.

Experiences, that sell your product.

INSIDE

4	GLOBAL TRACK
8	TRAC PRO
10	TRAC PULSE
12	TRAC BASE
14	3-PHASE TRACK LIGHT
16	STANDARD
18	DINGO
20	DYNAMO
22	ON LINE
24	ON DISC
26	ON TUBE
28	ON IMAGE T20
30	ON ZOOM
32	DOWNLIGHT
34	CASA CIRCLE
36	CASA SINGLE
38	FIRST CIRCLE
40	FIRST SINGLE
42	LEAN
44	LEAN MINI
46	PENDANT LIGHT
47	SECUR 816
48	DECORATIVE LIGHT
52	NEON SIGNS
54	SOUND

GLOBAL TRACK



TRAC PRO



TRAC PULSE




TRAC BASE




TRACK SYSTEM


GLOBAL TRAC PRO / 3-PHASE

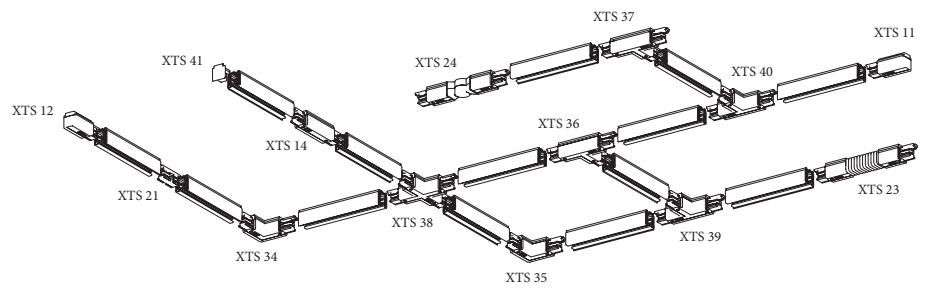

GLOBAL TRAC PULSE / DALI

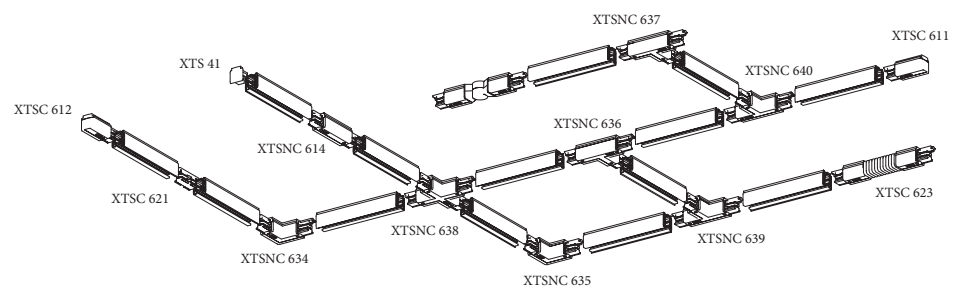

GLOBAL TRAC BASE / 1-PHASE

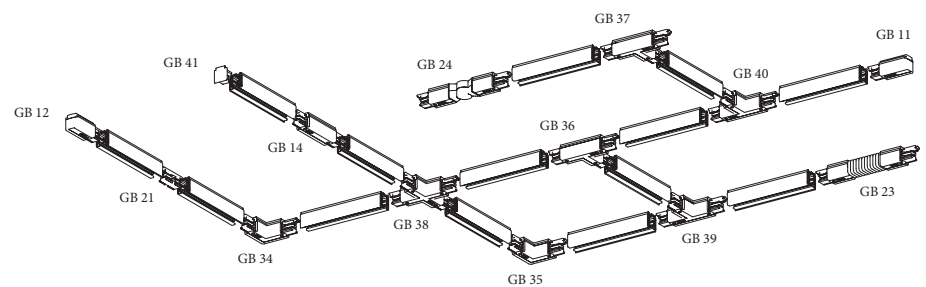


Additional accessories would be needed for recessed and suspended track systems.




POLARITY

GLOBAL TRAC PRO / 3-PHASE

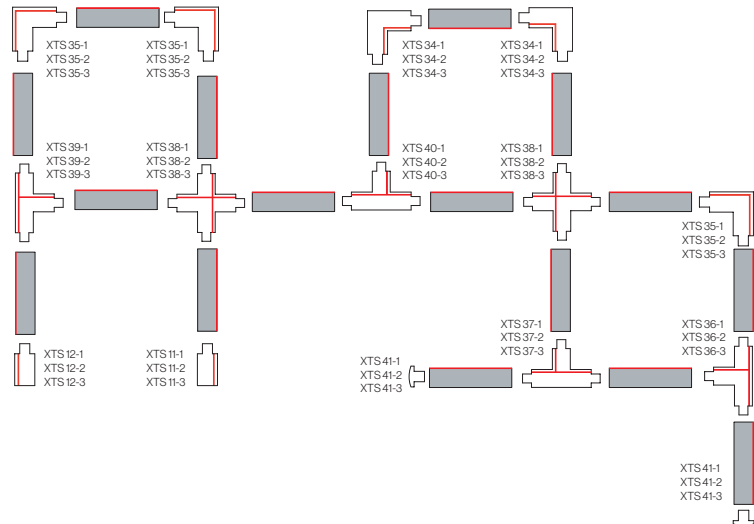

GLOBAL TRAC PULSE / DALI

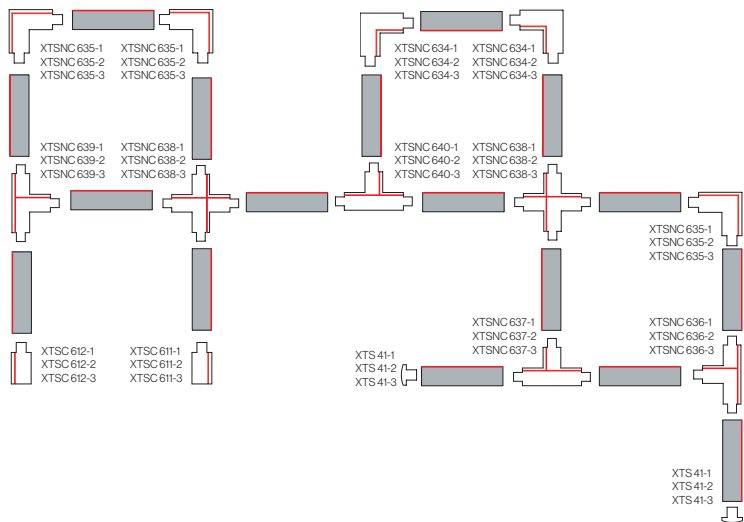

GLOBAL TRAC BASE / 1-PHASE

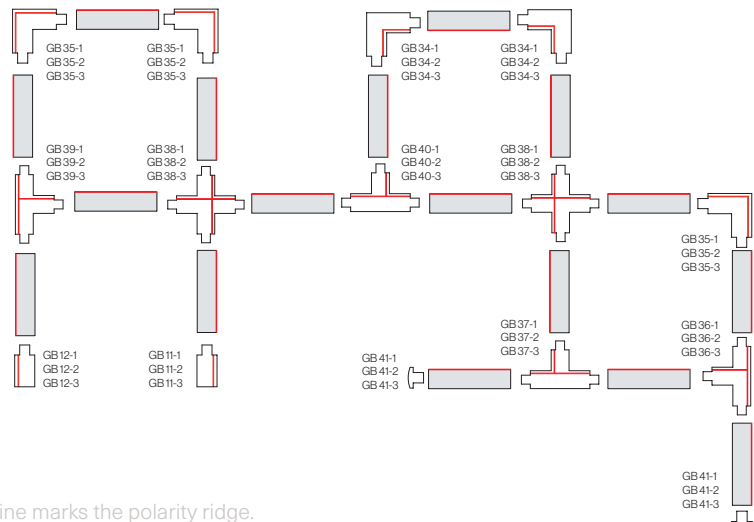


Diagram above shows the use of L-, T- and X-Feed. Red line marks the polarity ridge.
Available colours: -1 grey (RAL 7040), -2 black (RAL 9005), -3 white (RAL 9016).



TRAC PRO

Global Track

3-phase track

Specifications:

Material:	Die-cast aluminium
Guarantee:	10 years
Input:	Max. 16 A 230/400V
Installation:	Nordic Aluminium 3-phase track
Mounting:	XTS Surface, XTSF Recessed
Length:	1m/2m/3m/4m
Color:	White, black, silver
Recommended fastening distance:	1000mm
Recommended weight load:	<10kg, 100N
Protection:	IP20
Certifications:	CE





TRAC PULSE

Global Track

DALI track

Specifications:

Material:	Die-cast aluminium
Guarantee:	10 years
Input:	Max. 16 A 230/400V
Installation:	Nordic Aluminium DALI track
Mounting:	XTSC Surface, XTSCF Recessed
Length:	1m/2m/3m/4m
Color:	White, black, silver
Recommended fastening distance:	1000mm
Recommended weight load:	<10kg, 100N
Protection:	IP20
Certifications:	CE




White




Black



Silver



XTSC Surface



XTSCF Recessed



TRAC BASE

Global Track

1-phase track

Specifications:

Material:	Die-cast aluminium
Guarantee:	10 years
Input:	Max. 16 A 230/400V
Installation:	Nordic Aluminium 1-phase track
Mounting:	GB Surface, GBF Recessed
Length:	1m/2m/3m
Color:	White, black, silver
Recommended fastening distance:	1000mm
Recommended weight load:	<10kg, 100N
Protection:	IP20
Certifications:	CE




White



Black



Silver



GB Surface

GBF Recessed

3F TRACK LIGHT



STANDARD



ON LINE



DINGO



ON DISC



DYNAMO



ON TUBE



ON ZOOM






STANDARD

3-phase track light

High efficiency fixture
Best up to 3.5m mount height

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 15°, NFL 20°, FL 30°
Color options:	White, black, silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W
System flux:	3090lm (3000K), 3265lm (4000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Adapter:	Philips
Protection:	IP20
Dimmable:	Casambi, DALI, CC Wireless
Certifications:	CE
Accessories:	Honeycomb filter, Barndoors

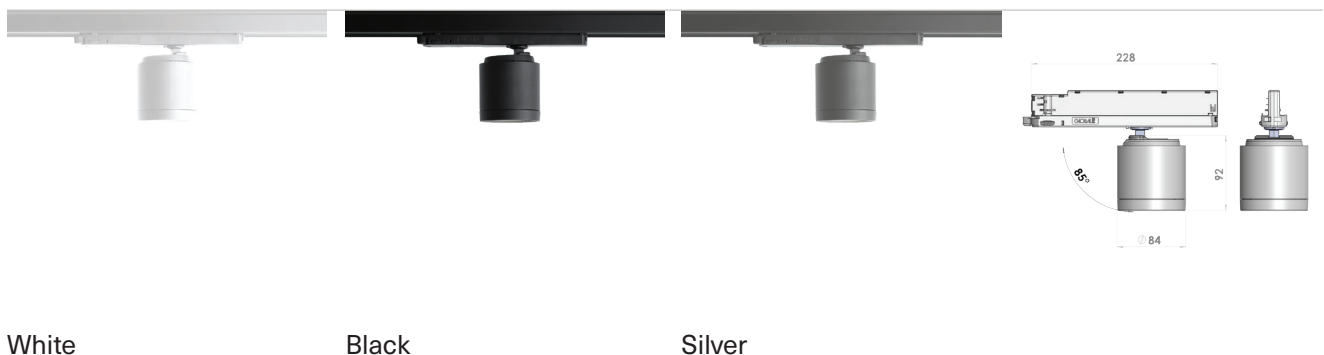




DINGO

3-phase track light

UGR < 5

Specifications:

Color Rendering:	CRI > 90
UGR:	4.5
Beam Angle:	SP 15°, NFL 28°, FL 35°
Color options:	White, black, silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	34W
System flux:	3225lm (2700K), 3350lm (3000K), 3400lm (3500K), 3575lm (4000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Adapter:	Citizen, Philips
Protection:	IP20
Dimmable:	Casambi, DALI, CC Wireless
Certifications:	CE

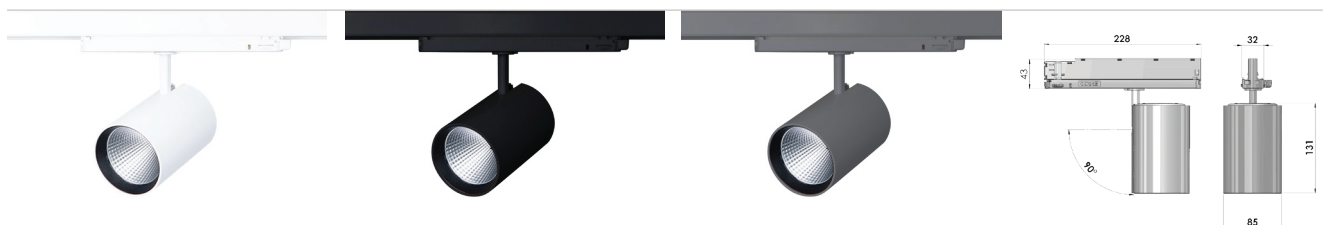

White

Black

Silver



DYNAMO

3-phase track light

Asymmetric light

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	Asymmetric
Color options:	White, black, silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Adapter:	Citizen, Philips
Protection:	IP20
Dimmable:	Casambi, DALI, CC Wireless
Certifications:	CE



White

Black

Silver




ON LINE 1200

3-phase track light

Low UGR option available
800mm length option available
Suspended option soon available

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	110°
Color options:	Black, White, Silver
Optics:	Opal, Micro Prism, Double Asymmetric
Color Temperature CCT:	3000K, 3500K, 4000K
Material:	Die-cast aluminium
Wattage:	70W, 48W (Low UGR)
Luminous flux:	6700lm (Micro Prism), 4000lm (Low UGR Micro Prism)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Adapter:	Citizen, Philips (Low UGR)
Protection:	IP40
Dimmable:	Fixed output, DALI
Certifications:	CE

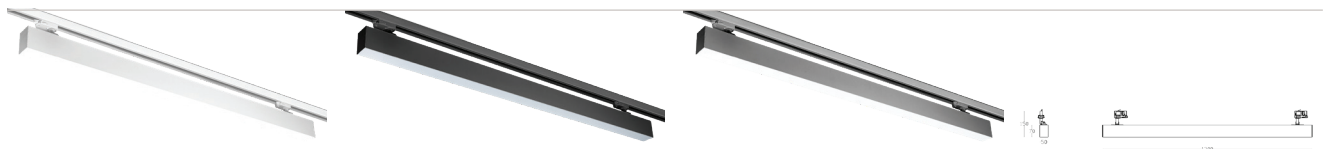

White

Black

Silver



ON DISC track light offers a combination of sleek design, flexible 350° rotation, tilting capabilities and versatility, making it a practical and versatile lighting solution for retail spaces. It features a seamless 300mm diameter, providing a clean and minimalist look in retail spaces.

ON DISC

3-phase track light

Uniform and diffuse light

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	90°
Color options:	Black, White
Color Temperature CCT:	3000K, 4000K
Material:	Die-cast aluminium
Wattage:	30W
Luminous flux:	2400lm
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Protection:	IP20
Dimmable:	-
Certifications:	CE



White

Black



ON TUBE

3-phase track light

Phase dim

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 20°, FL 36°
Color options:	Black, White
Color Temperature CCT:	2700K, 3000K, Dim to Warm
Material:	Die-cast aluminium
Wattage:	12W
Luminous flux:	740lm
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Adapter:	GA69
Protection:	IP20
Dimmable:	Phase dim
Certifications:	CE





ON IMAGE T20

Gobo projector track light

Customizable gobo filter design

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	20°
Color options:	Black, White
Color Temperature CCT:	6000K
Material:	Die-cast aluminium
Wattage:	20W
Luminous flux:	1600lm
Lifetime:	30.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	2 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Protection:	IP20
Dimmable:	ON/OFF
Certifications:	CE




White



Black



Adjustable light beam:



8°



60°



ON ZOOM

3-phase track light

UGR < 19

Specifications:


Color Rendering:	CRI > 90
Beam Angle:	8° - 60°
Color options:	Black, White
Color Temperature CCT:	3000K, 4000K
Material:	Die-cast aluminium
Wattage:	15W
Luminous flux:	190-420lm
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Nordic Aluminium 3-phase track
Adapter:	GA69 / GA021
Protection:	IP20
Dimmable:	-
Certifications:	CE



White



Black

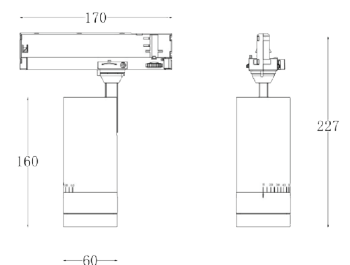

DOWNLIGHT



CASA CIRCLE



FIRST CIRCLE



CASA SINGLE



FIRST SINGLE



LEAN



LEAN MINI





CASA CIRCLE

Downlight

Small formfactor, tilting, lightweight

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 15°, NFL 21°, FL 32°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W (650mA)
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Spring mounted, no tools required
Protection:	IP20
Dimmable:	Casambi, DALI
Certifications:	CE




White



Black



Silver





CASA SINGLE

Downlight

Small formfactor, tilting, lightweight

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 15°, NFL 21°, FL 32°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W (650mA)
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Spring mounted, no tools required
Protection:	IP20
Dimmable:	Casambi, DALI
Certifications:	CE




White



Black



Silver





FIRST CIRCLE

Downlight

Tilting, high performance, classic design

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 10°, NFL 20°, FL 30°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W (650mA)
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Spring mounted, no tools required
Protection:	IP20
Dimmable:	Casambi, DALI
Certifications:	CE




White




Black



Silver



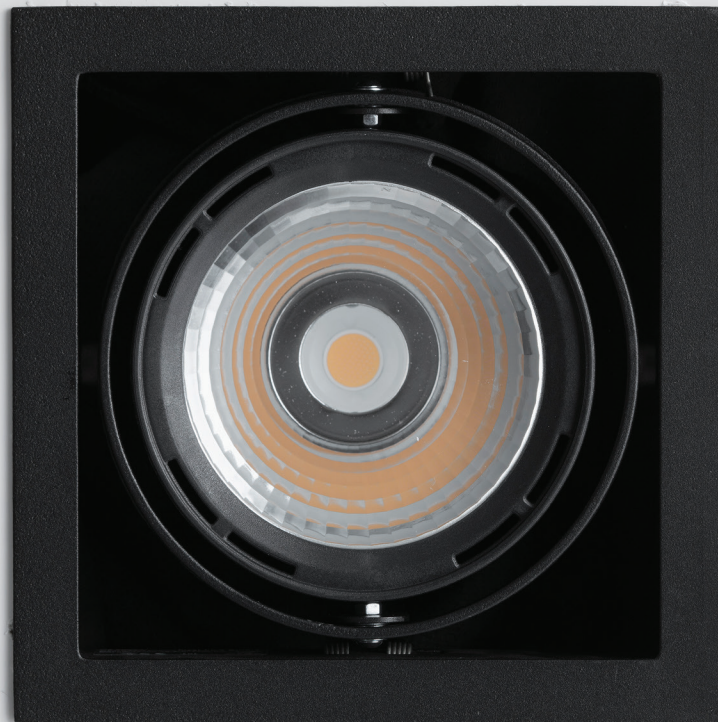

FIRST SINGLE

Downlight

Tilting, high performance, classic design

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 10°, NFL 20°, FL 30°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W (650mA)
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Spring mounted, no tools required
Protection:	IP20
Dimmable:	Casambi, DALI
Certifications:	CE




White



Black



Silver





LEAN

Downlight

Rotating, tilting

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 10°, NFL 20°, FL 30°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W (650mA)
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Spring mounted, no tools required
Protection:	IP20
Dimmable:	Casambi, DALI
Certifications:	CE




White



Black



Silver





LEAN MINI

Downlight

Rotating, tilting

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 15°, NFL 30°, FL 50°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	25,4W (650mA)
System flux:	3090lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Spring mounted, no tools required
Protection:	IP20
Dimmable:	Casambi, DALI
Certifications:	CE




White



Black



Silver



PENDANT



SECUR 816

PENDANT

MOUNT UP TO 7M

Specifications:

Color Rendering:	CRI > 90
Beam Angle:	SP 10°, NFL 30°, FL 50°
Color options:	Black, White, Silver
Color Temperature CCT:	2700K, 3000K, 3500K, 4000K
Material:	Die-cast aluminium
System power:	41,8W (1050mA)
System flux:	4736lm (3000K)
Lifetime:	50.000 hours L80B10
Color consistency:	MacAdams 2 SDCM
Guarantee:	5 years (LED Chip & driver)
Installation:	Suspended with power cable (3-5m)
Protection:	IP20
Dimmable:	Fixed output, DALI
Certifications:	CE




White



Black



Silver




DECORATIVE









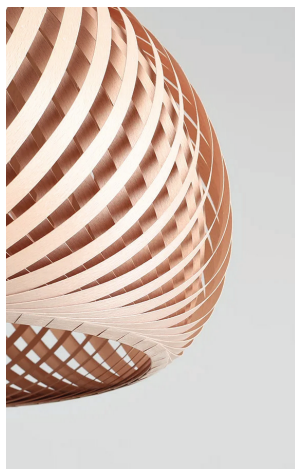

NEON SIGNS





Custom-made lighting solutions upon request



SOUND



SPOTTUNE

WIRELESS SPEAKER

Track, cord and recessed options available

Specifications:

Color:	Black, White, Silver
Frequency:	Audio frequency range 50-15000Hz
Wireless features:	Range up to 50 - 100m (Condition dependent)
Dimensions:	Ø115mm x H 200 mm
Weight:	1,5kg
Standby power consumption:	1,74W (Limitation 2W)
Installation:	Nordic Aluminium 3-phase track, Recessed, Cord
Accessories:	Omni Cover (Black, Silver)

Give your customers a 360° world-class sound experience with high quality wireless speaker system. Spottune is easily installed. With the lighting track system in place, the wireless speakers can be plugged in wherever you want. With or three simple design options (Recessed, Cord, Track), it is perfect for any situation and can give world class sound in any environment.



Track



Cord



Recessed



Omni Cover







