

ON PROFILE K


Datasheet

Lines of Light


Compact profiles for shelves, coves and more




Color	Beam Angle	CCT	Strip series	Max lumen/m	Other technical characteristics
 Any RAL color upon request	160°	2700K	Standard	1800	
		3000K	Standard x2	3600	
		3500K	High Power	3450	
		4000K	COB	1680	
		RGBW	RGBW	1700	

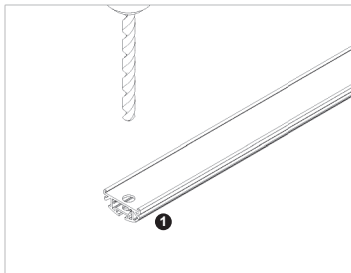


1. Drill a hole on the aluminium




2. Fit the led strip on the aluminium

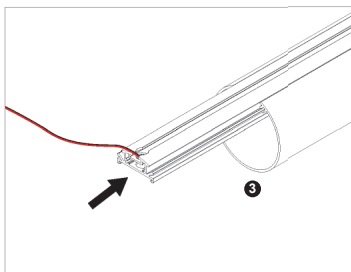


3. Click/snap on the diffuser from end to end



4. Install the suspension kits

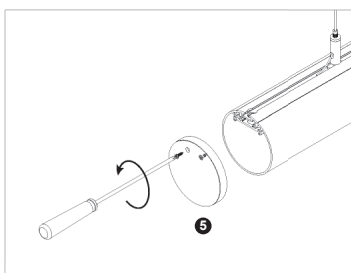

5. Screws the end caps




6. Installation completed.

Installation Parts

- 1: Aluminum Profile
- 2: LED strip
- 3: Diffuser
- 4: Suspension Kits
- 5: Aluminum Endcap (without hole)

Installation



Suspended

